


# ST Blade


## SPLIT BUS FUSE BLOCK

### Split Bus Fuse Block with ground for use when a mix of switched and 24-hour circuits are desired in the same block

- Provides two isolated groups of six ATO®/ATC® circuits
- For use with either two isolated batteries or with a single battery providing a mix of 24 hour and switched circuits
- Screw terminals for securing wires accept ring terminals
- One-piece stainless flange nuts ensure safe and secure connections for primary feed wires
- Clear insulating cover with label recesses and storage for two fuses, satisfies ABYC/USCG insulation requirements
- Tin-plated copper buses and fuse clips
- Fuses sold separately

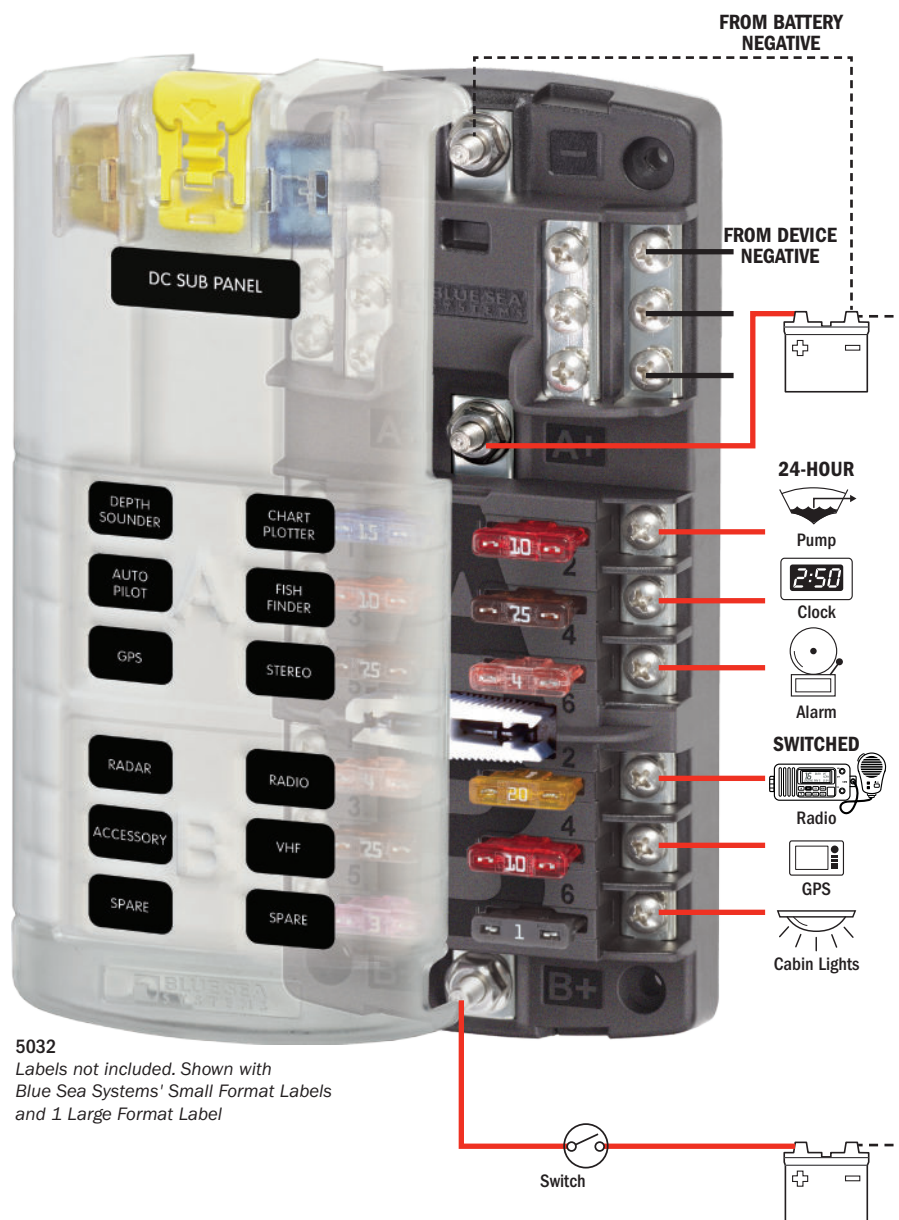

#### Related Products



ATO® or ATC® Fuses



easyID ATC® Fuses

# ST Blade

## SPLIT BUS FUSE BLOCK



### Specifications

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A (per circuit)
Amperage Max. Operating	100A total (not to exceed 80A per load group)
Fuse Type	ATO® or ATC® Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)

For additional specifications see [www.blueseas.com](http://www.blueseas.com)

PN	Circuits	Cover	Negative Bus	Positive Bus
5032	12	Yes	#10-32 stud	#10-32 stud

### Application Diagram

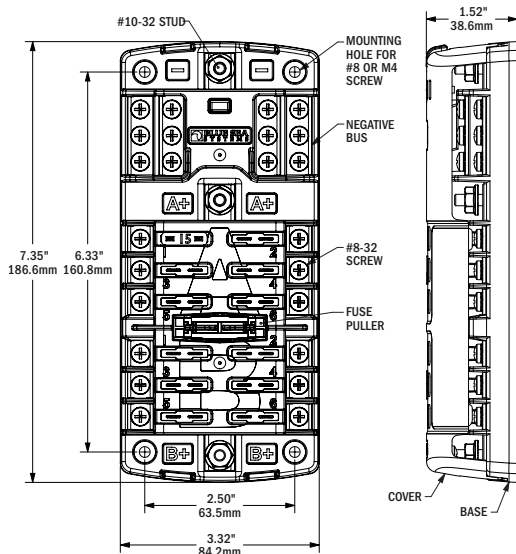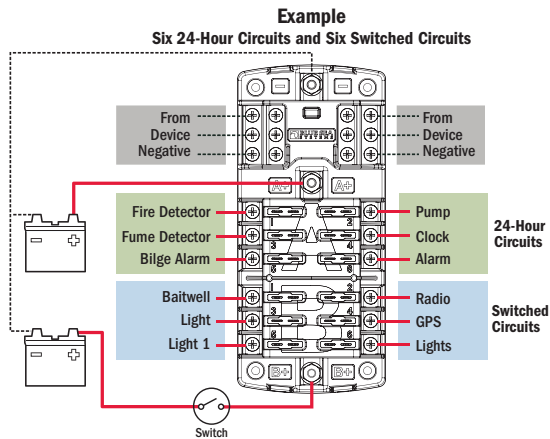

### Additional ST Blade Products

#### ST Blade Common Source Fuse Blocks Screw Terminal



5028  
6 circuit  
Positive bus



5025  
6 circuit  
Positive and negative bus



5029  
12 circuit  
Positive bus



5026  
12 circuit  
Positive and negative bus

#### ST Blade Independent Source Fuse Blocks Screw Terminal



5035  
6 circuit

#### ST Blade Battery Terminal Mount Fuse Block Screw Terminal



5023  
4 circuit



425 Sequoia Drive  
Bellingham, WA 98226 USA  
p 360.738.8230  
f 360.734.4195  
[conductor@blueseas.com](mailto:conductor@blueseas.com)  
[www.blueseas.com](http://www.blueseas.com)

Specifications subject to change.  
See [blueseas.com](http://blueseas.com) for current information.  
980018870 Rev.001